




REVISIONS			
REV.	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	11/24/09	EK

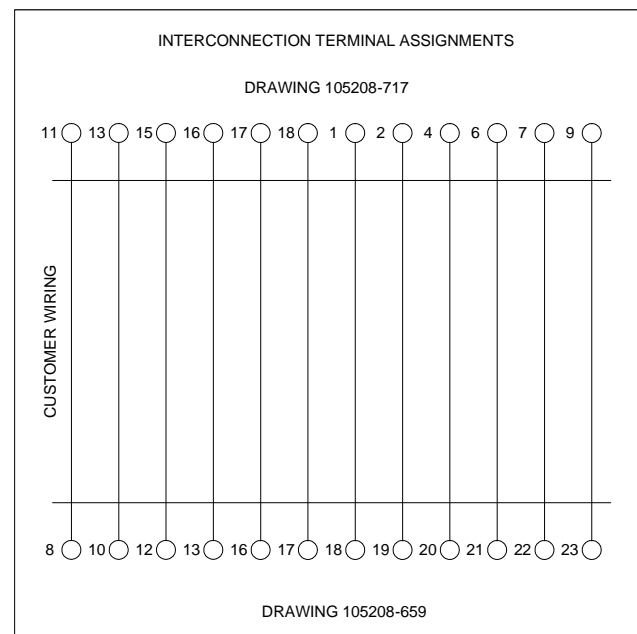

- NOTES:**
- DO NOT SCALE THIS DRAWING.
  - INTERCONNECTION WIRING SHOULD BE MINIMUM OF 16AWG (1.25MM) FOR PROX WIRING & 14AWG (2.00MM) FOR DRIVE & HPU MOTOR WIRING.
  - JUMP TERMINALS 8-->9 & 10-->11.
  - THIS DRAWING IS FOR USE WITH HYDRA PRODUCTS MINI HPU.
  - IT IS PERMISSABLE TO USE ONE (1) OR TWO (2) CORDS BETWEEN MONITOR J-BOX & HPU J-BOX

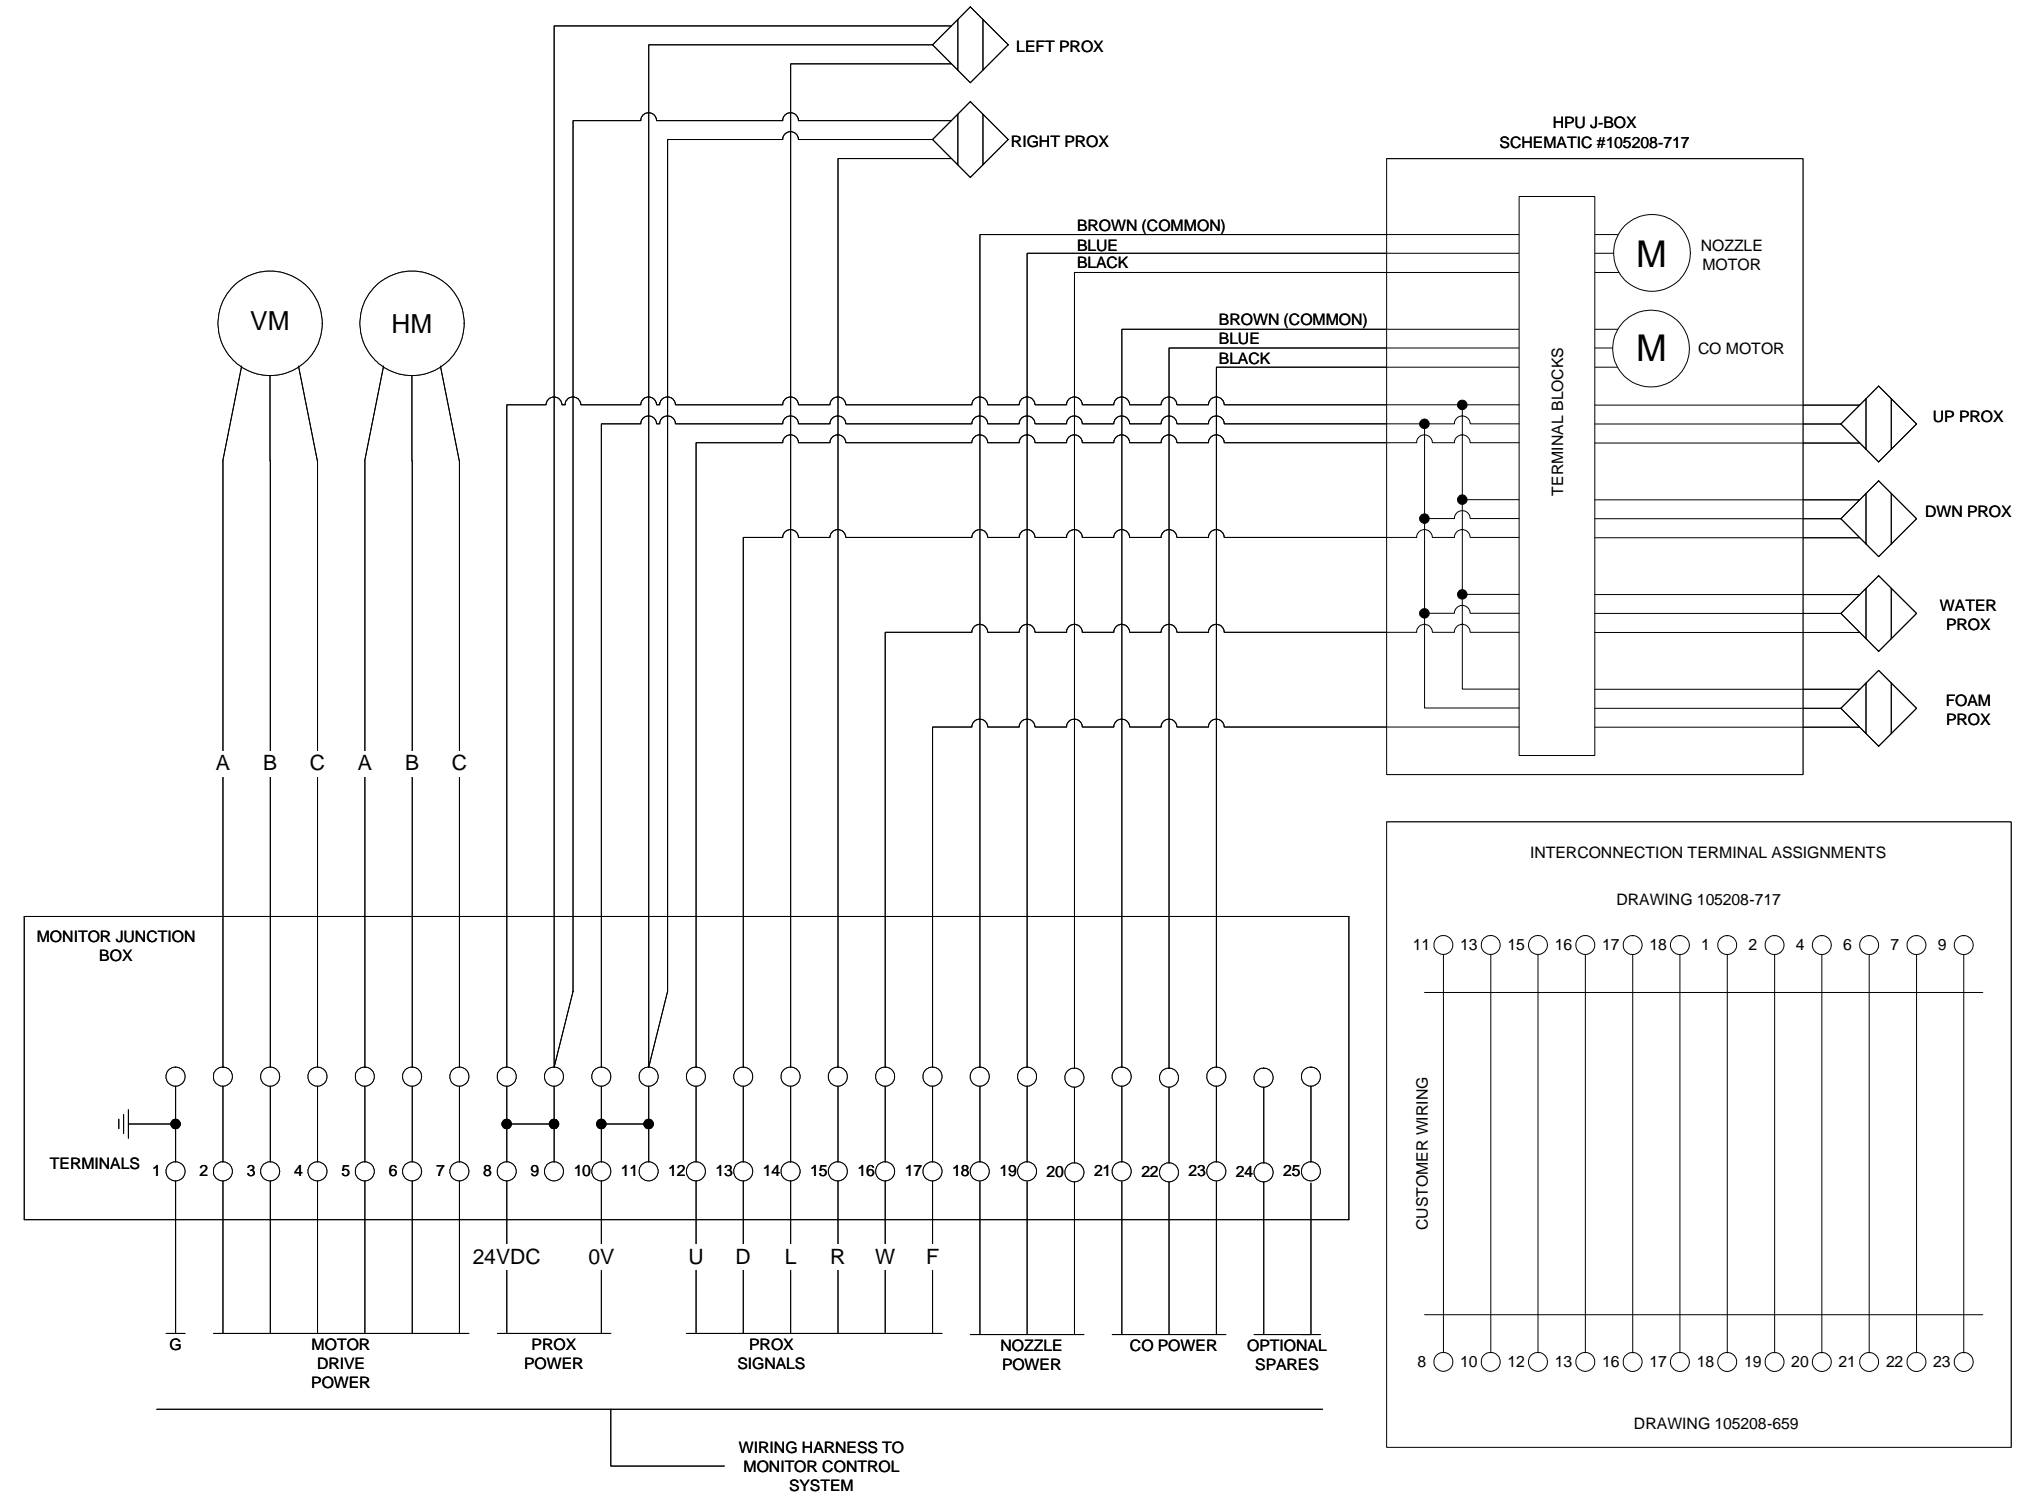

**STANG INDUSTRIES INC.**  
WWW.STANGINDUSTRIES.COM  
951-479-9810

## ELECTRICAL SCHEMATIC

**SCHEMATIC, MONITOR J-BOX FOR 3 PHASE MOTOR & HYDRAULIC NOZZLE & CHANGEOVER**

PART#	105208-659		REF PART #	
CAGE	55822	DRAWN	EK	CHECK
DATE	11/24/09	DESIGN		REVISION
			SCALE	NTS
			SHEET	1 OF 1

B

The information and design disclosed herein is the property of Stang Industries Inc. All proprietary use and sales rights thereto are reserved. This disclosure is confidential and must not be copied in whole or part.