


- NOTES:  
 1) DO NOT SCALE THIS DRAWING  
 2) REMOVE ALL BURRS AND SHARP EDGES

FILL / BLEEDING PROCEDURE

- 1) CLOSE VALVE #1, OPEN VALVE #2 AND OPEN PETCOCK AT REAR OF NOZZLE
- 2) REMOVE CAP FROM FILL CONNECTION #1 AND ATTACH FILL LINE
- 3) INSERT FILL LINE INTO OPEN 1 QUART CONTAINER OF FLUID
- 4) TURN OVERRIDE HANDLE CLOCKWISE UNTIL ALL AIR IS BLED FROM LINE
- 5) CLOSE PETCOCK AND VALVE #2
- 6) REPLACE CAP ON FILL CONNECTION #1
- 7) OPEN VALVE #1 AND PETCOCK AT FRONT OF FOG NOZZLE
- 8) REMOVE CAP FROM FILL CONNECTION #2 AND ATTACH FILL LINE
- 9) INSERT FILL LINE INTO OPEN 1 QUART CONTAINER OF FLUID
- 10) TURN OVERRIDE HANDLE COUNTER-CLOCKWISE UNTIL ALL AIR IS BLED FROM LINE
- 11) CLOSE PETCOCK AND VALVE #1
- 12) REPLACE CAP ON FILL CONNECTION #2

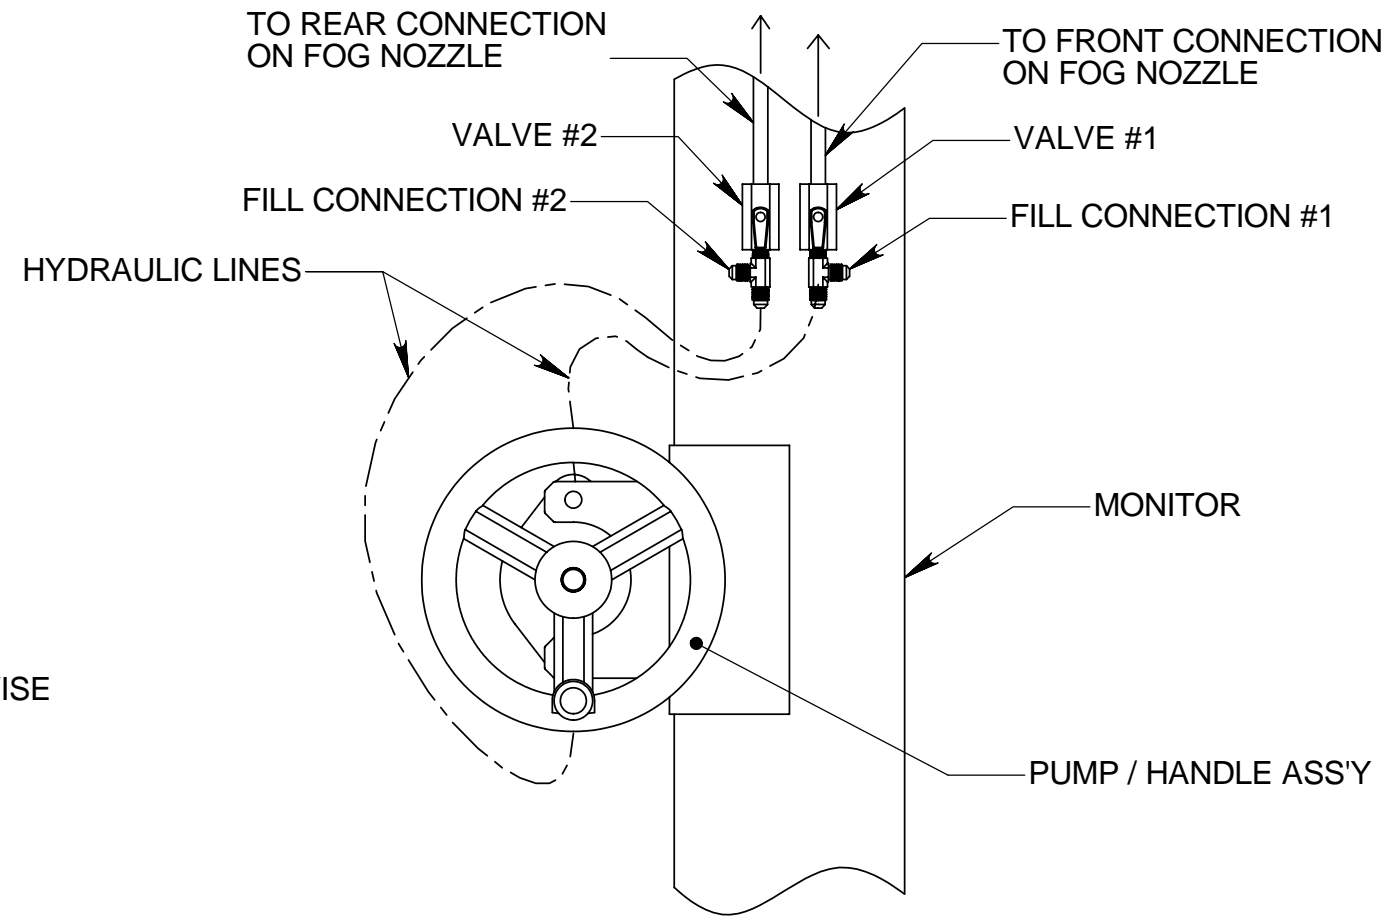

OPERATION INSTRUCTIONS


- 1) OPEN VALVE #1 AND VALVE #2
- 2) OPERATE NOZZLE BY TURNING OVERRIDE HANDLE CLOCKWISE TO INCREASE FOG OR COUNTER-CLOCKWISE TO DECREASE FOG
- 3) TO LOCK NOZZLE IN POSITION, CLOSE VALVE #1 AND VALVE #2

RECOMMENDED OILS:

- 1) SHELL - TELLUS PLUS OIL 32
- 2) MOBIL - DEXTRON III (RED OIL)

<b>NEXT APPLICATION</b>	<b>55822</b>

The information and design disclosed herein is the property of GST Industries Inc. All proprietary use and sales rights thereto are reserved. This disclosure is confidential and must not be copied in whole or part.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ANGULAR .XX ±.03 ±2° .XXX ±.010 <b>DO NOT SCALE DRAWING</b>		 <b>STANG INDUSTRIAL PRODUCTS</b> A DIVISION OF GST INDUSTRIES 16692 BURKE LN. HUNTINGTON BEACH, CA 92647	
TREATMENT		<b>FILL/OPERATION DIRECTIONS</b> FOR ELEVATED MONITOR W/ HANDLEWHEEL	
FINISH		PART# <b>TB-67</b>	REF PART # <b>B</b>
NOTE		CAGE <b>55822</b>	REVISION
		DATE <b>12-28-01</b>	SCALE <b>1 / 5</b>
		DESIGN <b>RBS</b>	SHEET <b>1 OF 1</b>